



EFB 80 x 80 x 25.4 MM SERIES

DIMENSIONS DRAWING

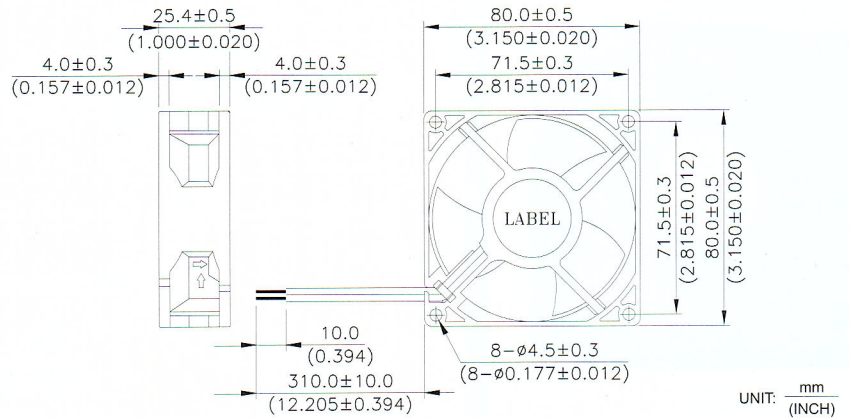


- * Bearing Type
Two Ball Bearings
- * Material
Impeller & Frame : Plastic (UL 94V-0)
- * Lead Wires :
UL 1007 AWG #24 Or Equivalent
Red Wire Positive (+)
Black Wire Negative (-)
- * Weight : 86g (3.03 oz)

P & Q CURVE (AT RATED VOLTAGE)

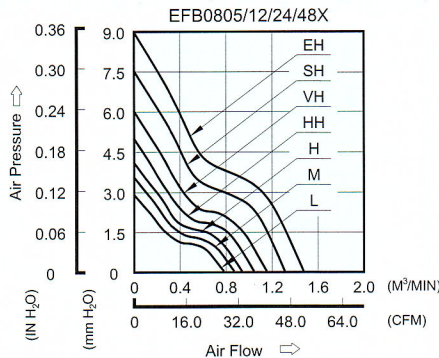

MOUNTING PANEL CUTOUT

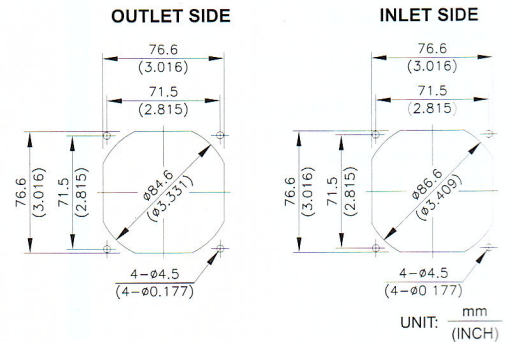

MODELS		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
TWO BALLS	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A
EFB0805L	-R00 / -F00	5	4.5 to 5.5	0.16	0.80	2700	0.783	27.65	2.89	0.114	27.5
EFB0812L	-R00 / -F00	12	7.0 to 13.8	0.07	0.84						
EFB0824L	-R00 / -F00	24	14.0 to 27.6	0.04	0.96						
EFB0848L	-R00 / -F00	48	28.0 to 56.0	0.03	1.44						
EFB0805M	-R00 / -F00	5	4.5 to 5.5	0.20	1.00	3000	0.872	30.79	3.54	0.139	29.5
EFB0812M	-R00 / -F00	12	7.0 to 13.8	0.09	1.08						
EFB0824M	-R00 / -F00	24	14.0 to 27.6	0.05	1.20						
EFB0848M	-R00 / -F00	48	28.0 to 56.0	0.03	1.44						
EFB0805H	-R00 / -F00	5	4.5 to 5.5	0.24	1.20	3250	0.940	33.20	4.08	0.161	31.5
EFB0812H	-R00 / -F00	12	7.0 to 13.8	0.10	1.20						
EFB0824H	-R00 / -F00	24	14.0 to 27.6	0.05	1.20						
EFB0848H	-R00 / -F00	48	28.0 to 56.0	0.04	1.92						
EFB0805HH	-R00 / -F00	5	4.5 to 5.5	0.30	1.50	3600	1.043	36.83	4.97	0.196	34.0
EFB0812HH	-R00 / -F00	12	7.0 to 13.8	0.13	1.56						
EFB0824HH	-R00 / -F00	24	14.0 to 27.6	0.07	1.68						
EFB0848HH	-R00 / -F00	48	28.0 to 56.0	0.04	1.92						
EFB0812VH	-R00 / -F00	12	7.0 to 13.8	0.15	1.80	4000	1.154	40.75	5.99	0.236	37.5
EFB0824VH	-R00 / -F00	24	14.0 to 27.0	0.08	1.92						
EFB0848VH	-R00 / -F00	48	28.0 to 56.0	0.05	2.40						
EFB0812SH	-R00 / -F00	12	7.0 to 13.8	0.22	2.64						
EFB0824SH	-R00 / -F00	24	14.0 to 27.0	0.11	2.64	4500	1.310	46.26	7.49	0.295	40.0
EFB0848SH	-R00 / -F00	48	28.0 to 56.0	0.06	2.88						
EFB0812EH	-R00 / -F00	12	7.0 to 13.8	0.28	3.36						
EFB0824EH	-R00 / -F00	24	14.0 to 27.0	0.14	3.36						
EFB0848EH	-R00 / -F00	48	28.0 to 56.0	0.07	3.36	5000	1.473	52.02	8.94	0.352	42.5

* Function type is optional.
 * The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
 * Noise is measured in anechoic chamber in free air, one meter from intake side.
 * All readings are typical values at rated voltage.
 * Specifications are subject to change without notice.