

∅ 220 x 71 mm

New !



Approvals



See selection guide pages 15 to 26

Life expectancy

L-10 LIFE AT 40°C:

80 000 hours

For more details, see page 14

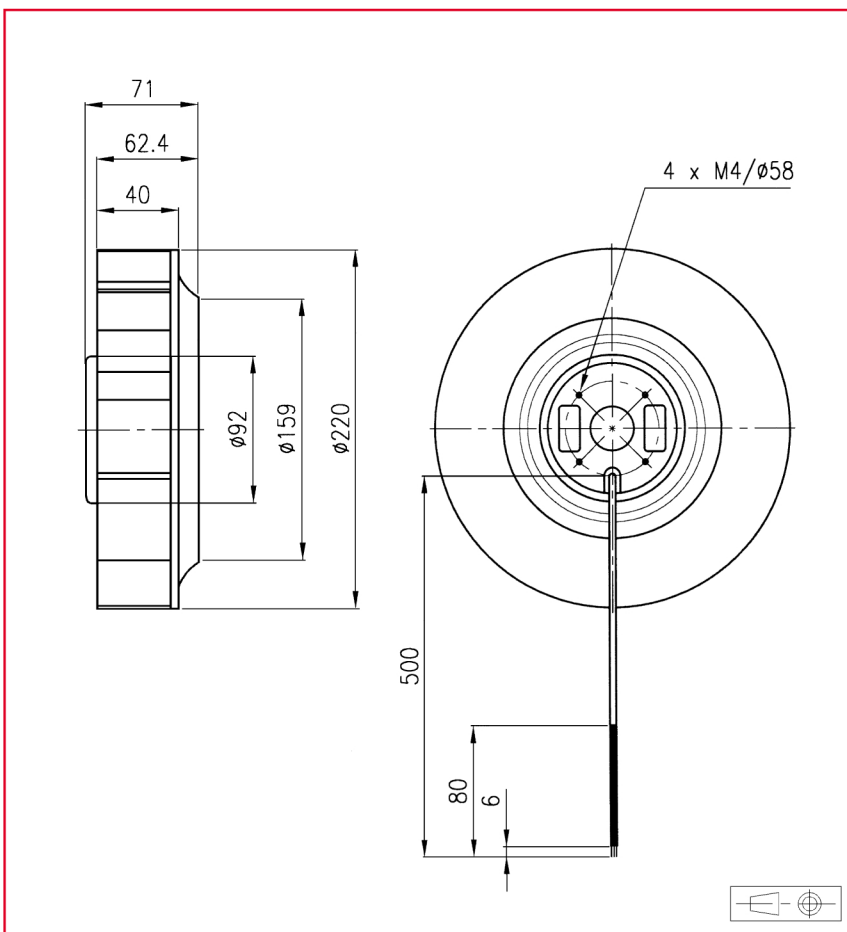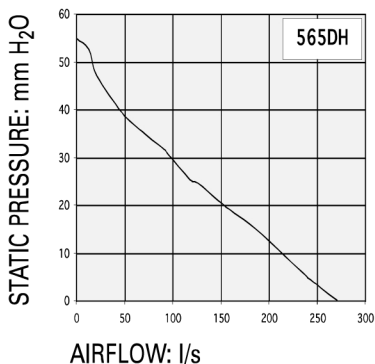

Brushless DC Motor

Wheel material: plastic UL 94 VO or steel
 Bearing system: ball bearings
 Connection: flying leads
 Electrical protection: thermally protected

Design code: C13 - Tropicalized
 IP 44
 Speed sensor (TTL or open collector)
 Variable speed (0 - 10 V input / PWM)

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Input power	Voltage range	Bearing system		Connection type		Operating temperature	
	V						I/s	dB(A)	RPM	W	V	Ball
565DH4LM19000	48	271,0	71	2950	94,5	(36-60)	x		x		- 20	70

Additional versions:
 Salt spray protection - IP 54 - alarm as options
 Other voltages: consult factory

Non contractual document. Specifications are subject to change without notice. Pictures for information only. Edition N°1.

Backward Curved Fans