ø 350 x 254 mm

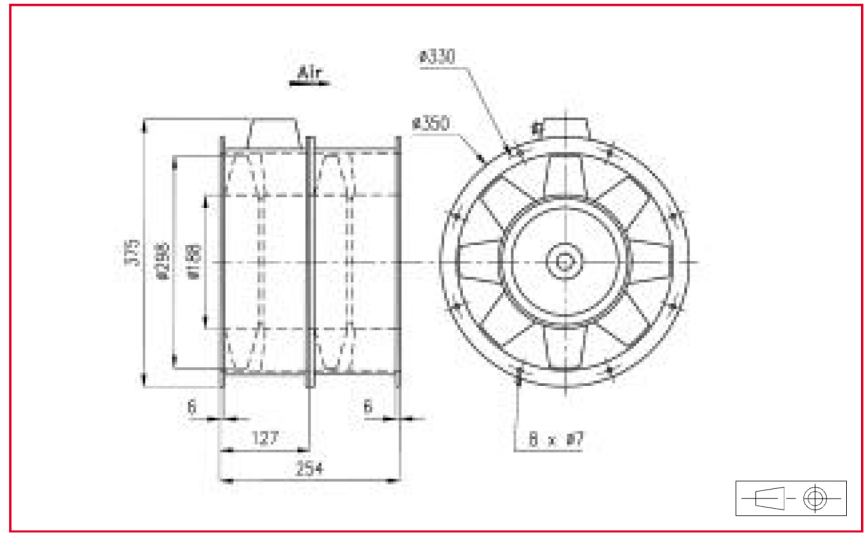

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
25 000 hours
For more details, see page 14

AC Motor
Housing material: Aluminium
Impeller material: Aluminium
Weight: 17 kg
Bearing system: ball bearings

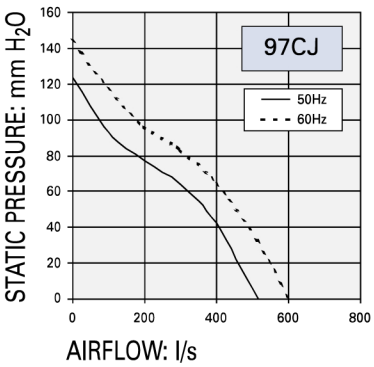

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor	Input power	Nominal current	Starting current	Bearing system	Connection type	Opearting temperature	
	V	l/s	dB(A)	rpm	Hz		µF	W	mA	mA	Leads	Terminals	°C	°C
97CJ116DC13	220	514	81	2850	50	3		306	1450	6800		X	- 10	70
	380	514	81	2850	50	3		306	850	4000		X	- 10	70
	220	600	84	3300	60	3		344	1100	6000		X	- 10	70
	380	600	84	3300	60	3		344	650	3500		X	- 10	70

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 154, 156, 158 and 162

Non contractual document. Specifications are subject to change without notice. Pictures for information only. Edition N°1.