ø 350 x 263 mm

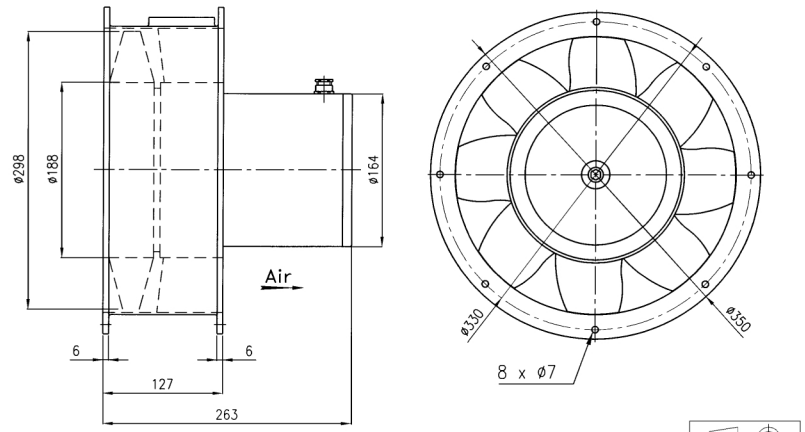

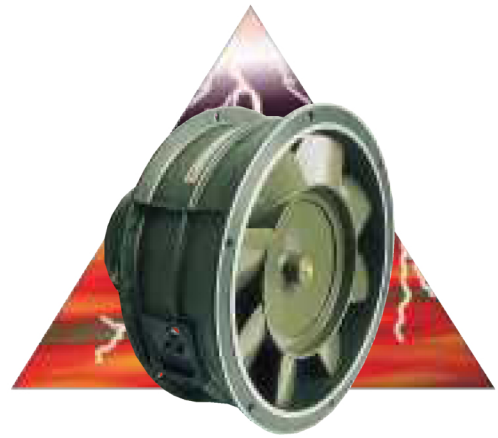

Brushless DC Motor
Housing material: Aluminium
Impeller material: Aluminium
Weight: 14 kg
Bearing system: ball bearings

Connection: terminal block

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
25 000 hours
For more details, see page 14

High Performance

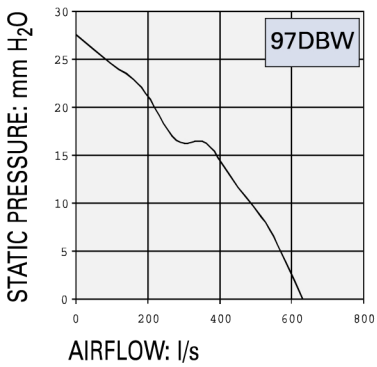

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Input power	Voltage range	Bearing system		Connection type		Opearting temperature	
	V	l/s	dB(A)	RPM	W	V	Ball	Sleeve	Leads	Terminals	Min. °C	Max. °C
97DBW01C6200	26	514	80,5	3050	200	(16-30)	X		X		- 25	60

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 154, 156 and 158

Non contractual document. Specifications are subject to change without notice. Pictures for information only. Edition N°1.