# ø 240 x 152 mm

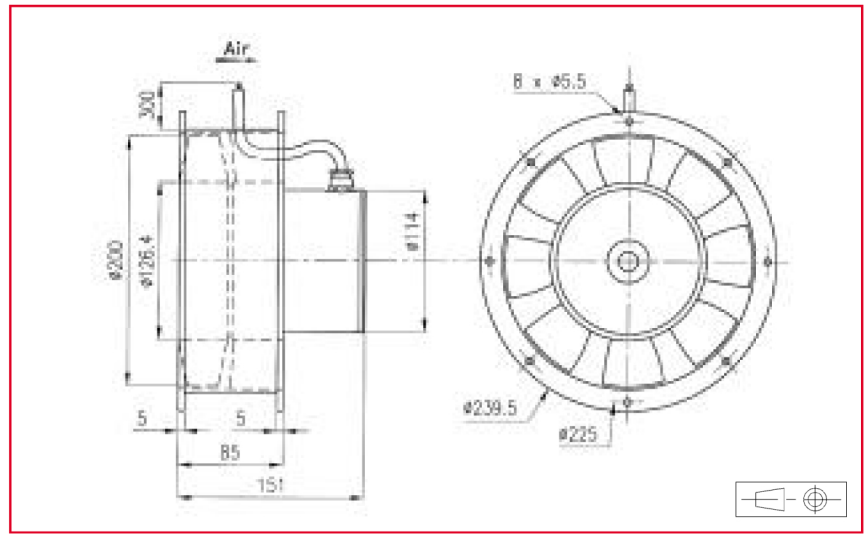


**Approvals**
See selection guide pages 15 to 26

**Life expectancy**
L-10 LIFE AT 40°C:
**80 000 hours**
For more details, see page 14

**Brushless DC Motor**
Electrical protection: integrated circuit
Housing material: Aluminium
Impeller material: Metal
Weight: 5,2 kg

**Available with:**
- on/off low level
- optional outputs available
- variable speed
- CTN

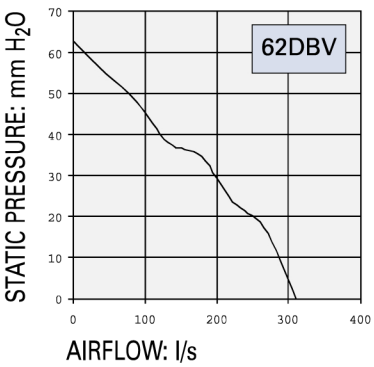


| Part number | Nominal voltage | Airflow | Noise level | Nominal speed | Input power | Voltage range | Bearing system | | Connection type | | Opearting temperature | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | l/s | dB(A) | RPM | W | V | Ball | Sleeve | Leads | Terminals | Min. °C | Max. °C |
| 62DBV01F6201 | 48 | 310 | 73,5 | 4350 | 120 | (42-54) | X | | X | | - 25 | 60 |

**Accessories:**
See pages: 154, 156 and 158

High Performance

Non contractual document. Specifications are subject to change without notice. Pictures for information only. Edition N°1.