ø 320 x 214 mm

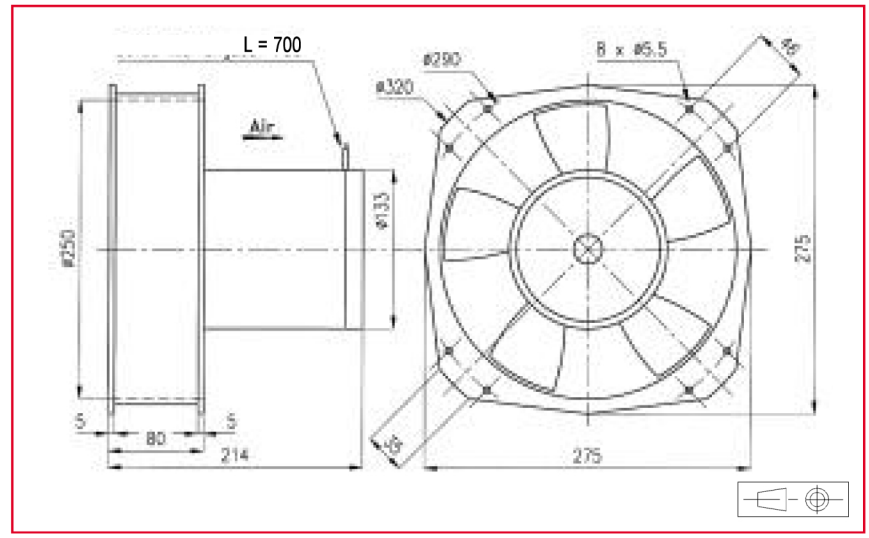

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
35 000 hours
For more details, see page 14

400 Hz Motor
Housing material: Aluminium
Impeller material: Aluminium
Weight: 9,5 kg
Bearing system: ball bearings
Connection: flying leads

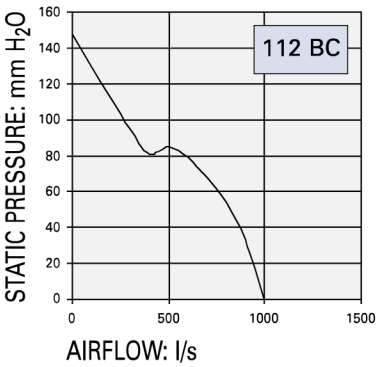

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor	Input power	Nominal current	Starting current	Opearting temperature	
	V	l/s	dB(A)	RPM		µF	W	mA	mA	Min. °C	Max. °C
112BC0160C13	200	970	85	5500	3		1250	4200	14000	- 10	70
112BC0162C13	115	970	85	5500	3		1250	7250	24000	- 10	70

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 156 and 158

Non contractual document. Specifications are subject to change without notice. Pictures for information only. Edition N°1.